# MCP4 Double Pole Changeover Contact MCP4 Double Pole Changeover Contact Model (Red Versions)

## Product Benefits

- Unique 'Plug & Play' installation concept
- Total 'Flex-Ability' in the choice of operating element
- Anti-Tamper facility
- Enhanced aesthetics
- Fully approved to the latest standards
- Backward compatibility
- CPD Approved

Product Overview



Installation efficiency, flexibility and full compliance with the latest standards are at the heart of the new MCP indoor call point range.

Installation time and ultimately cost, are of paramount importance to any fire or security installer. The MCP range directly reflects this need by providing a unique 'plug and play' concept designed specifically to reduce installation time. All new MCP products utilise a special terminal block, where all initial installation cabling is terminated. This terminal block is then simply connected to the back of the MCP. Simple, but effective, with no re-termination required and no time wasted.

Through new standards and legislation, both break glass and resettable operating elements can now be used within a manual call point. To provide you with the greatest 'flex-ability', the new MCP range can be configured as either a break glass or resettable unit by simply changing from one element to another. No other additional parts or alternative products need to be ordered.

All MCP indoor call point products also help preserve the integrity of the overall system, as illegal removal of the product lid will result in the call point operating and the system going into alarm.

Full compliance with the latest standards is essential and the new MCP indoor call point range is fully approved to the latest EN54-11 standard (compliant markings only).

The MCP4A product version is supplied with a double pole changeover set of contacts. The product utilises two terminal blocks and wiring to the relevent terminals on these terminal connector blocks provides either a 'normally open' or 'normally closed' operation (see wiring diagram overleaf).








# **Electrical Specification**

Connection Details: Cable Termination: Maximium Voltage: Current Rating (switch only): See Figure .1 0.5-2.5mm<sup>2</sup> 30VDC 2 Amps

**Environmental Specification** 

Humidity:93± 3% non-condensingOperating Temperature:-10°C to +55°CStorage Temperature:-10°C to +55°CIngress Protection (IP) Rating:IP24DFor RoHS, WEEE & REACH information please see www.kac.co.uk

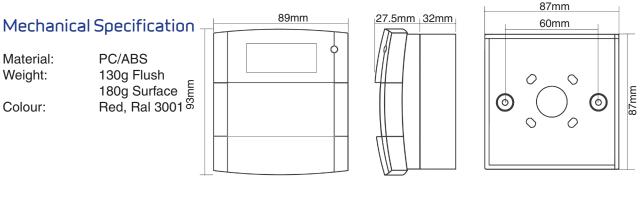

## Ordering Information

Model	Electrical Configuration	Mounting	Operating	Markings
MCP4A-R000FG-K013-01	N\O & N\C contacts 30VDC	Flush	Glass	EN54-11
MCP4A-R000SG-K013-01	N\O & N\C contacts 30VDC	Surface	Glass	EN54-11
MCP4A-R000SF-K013-01	N\O & N\C contacts 30VDC	Surface	Flexi	EN54-11

N = N C = Normally Closed Contact

N\O = Normally Open Contact

SAV = Savwire system

Accessories			
Code	Description		
SC070	Pack Of Ten Test Keys		
KG1 x 5	Pack Of Five Glass Elements (Also available in packs of 10, 25 & 50)		
PS210	Flexible Operating Element		
PS200	Plain Hinged Cover		
SC071	Pack Of Twenty Termina	al Blocks	

KAC Alarm Company Ltd KAC House, Thornhill Road, North Moons Moat, Redditch, B98 9ND, United Kingdom Tel: +44 (0) 1527 406655 Fax: +44 (0) 1527 406677 e-mail: marketing@kac.co.uk Figure .1

